

# HOLE HAMMER®

POSITIVE-TURN REVERSE PNEUMATIC PIERCING TOOLS



**EFFICIENT TOOL MAINTENANCE.** Tailbolt system provides ease of access for tool maintenance, requiring a maximum of only 35 ft-lb (47.5 Nm) of torque.



**EXTENDED TOOL BODY LIFE.** Replaceable head design is a heat-treated alloy to protect the tool body and can be replaced to help extend the tool body life.




**LONG-LASTING PERFORMANCE.** Wear rings on pistons help extend tool life and maximize tool performance.



**MAXIMUM RELIABILITY.** Proven positive-turn reverse design has minimal moving parts, delivering maximum reliability.



**OPERATOR-FRIENDLY FEATURES.** Oiler assemblies feature a quick reverse swivel kit for air-on reversing, a sight glass to see oil levels and a pressure relief cap.

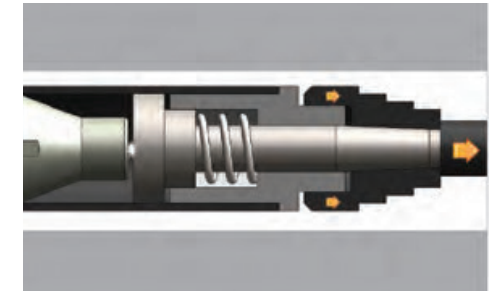

**OPTIMIZED ACCURACY AND PRODUCTIVITY.** The moving head option on the 2.5-in (6.8-cm) and 3-in (7.6-cm) piercing tools help improve accuracy and help improve productivity on high-production jobsites.

ALL COMPONENTS OF THE VERMEER HOLE HAMMER ARE MADE OF HIGH-GRADE ALLOY STEEL THAT IS CNC-MACHINED FOR PRECISION FITMENT, PROVIDING MAXIMUM TOOL EFFICIENCY AND PRODUCT PERFORMANCE.

   [VERMEER.COM](https://www.vermeer.com)



EQUIPPED TO  
DO MORE.



# HOLE HAMMER®

## POSITIVE-TURN REVERSE PNEUMATIC PIERCING TOOLS

### HIGH PRODUCTIVITY. LOW MAINTENANCE.

The Vermeer Hole Hammer® handles a full range of projects. Contractors have counted on Vermeer for piercing tools from the very beginning of the trenchless age. Today, whether you specialize in gas and electric, fiber and telecom or water and irrigation installations, Hole Hammer positive-turn reverse piercing tools put the power of a proven and reliable design in your hands—with legendary support and service from the industry's largest distribution network.



MODEL	DIAMETER	LENGTH	WEIGHT	AIR CONSUMPTION	AIR PRESSURE	REVERSE	BLOWS/MIN
VPT200	2 in (5.2 cm)	47.3 in (120 cm)	31 lb (14.1 kg)	22 cfm (623 L/min)	110 psi (.76 MPa)	8 turns	470
VPT250	2.5 in (6.8 cm)	51.9 in (131.8 cm)	58 lb (26.3 kg)	31 cfm (877.8 L/min)	110 psi (.76 MPa)	6 turns	385
VPT250S	2.5 in (6.8 cm)	38.6 in (98 cm)	41 lb (19.1 kg)	21.5 cfm (609 L/min)	110 psi (.76 MPa)	6 turns	385
VPT250RT	2.5 in (6.8 cm)	51.9 in (131.8 cm)	57 lb (25.9 kg)	31 cfm (877.8 L/min)	110 psi (.76 MPa)	6 turns	385
VPT300	3 in (7.6 cm)	56.1 in (142.5 cm)	75 lb (34 kg)	32 cfm (906.1 L/min)	110 psi (.76 MPa)	5 turns	370
VPT300RT	3 in (7.6 cm)	56.1 in (142.5 cm)	76 lb (34.5 kg)	32 cfm (906.1 L/min)	110 psi (.76 MPa)	5 turns	370
VPT400	4 in (9.8 cm)	64 in (162.6 cm)	136 lb (61.6 kg)	68 cfm (1,926 L/min)	110 psi (.76 MPa)	7 turns	370
VPT500	5 in (13 cm)	64.3 in (163.3 cm)	251 lb (113.9 kg)	98 cfm (2,800 L/min)	110 psi (.76 MPa)	7 turns	333



Vermeer MV Solutions, Inc. reserves the right to make changes in engineering, design and specifications; add improvements; or discontinue manufacturing at any time without notice or obligation. Equipment shown is for illustrative purposes only and may display optional accessories or components specific to their global region. Please contact your local Vermeer dealer for more information on machine specifications. Vermeer and the Vermeer logo are trademarks of Vermeer Manufacturing Company in the U.S. and/or other countries. © 2022 Vermeer MV Solutions, Inc. All Rights Reserved. Printed in the U.S.A. Please recycle.

